



# MC 102-A

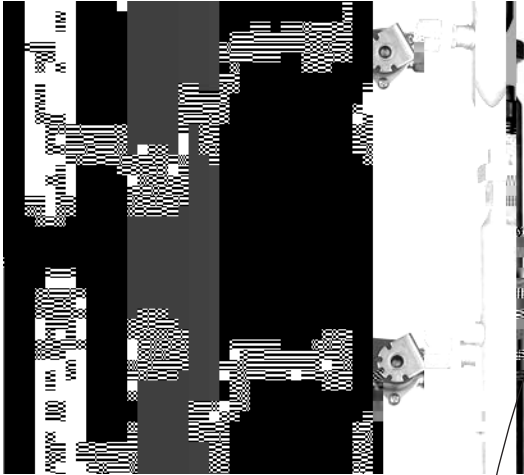

**D.**  
Ma f d c 4 e e b r c a a b l e d e d e d e d  
U, c d a d m e d a e n n a a r f n r e .

**P.**  
1/2 i c P e C e r S d e r U a b l e r e l  
S 4 N e U B e l e e S e d  
I c d e T F W K E a c C N a s  
T 3/8 NPT 3/8 T b e  
O e 0.5 s m F O r f c e  
O e 3/8 NPT 3/8 NPT C s  
20 F e e l 3/8 O.D. N T b s

24 VAC 50/60 H O e b l s V N a r e  
C r e n : I R 12 VA (500 mA) H d s 4.63 VA (193 mA)  
P e r C m n : 7 W PRODUCTS 2-L e M s M a f a a c e

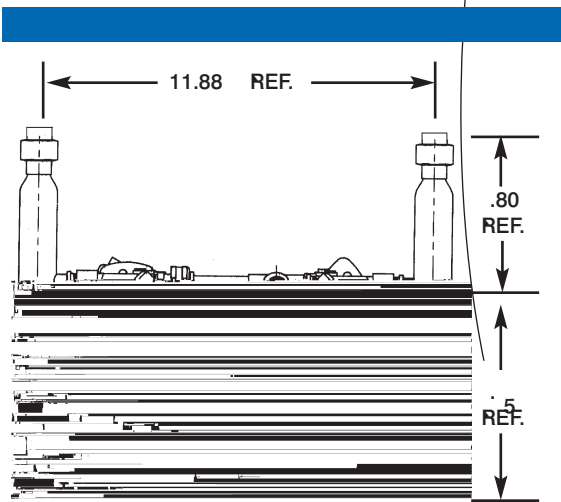

INSTALLATION NOTE: MANIFOLD MUST BE MOUNTED  
A MINIMUM OF 2-3/4 INCHES FROM FACE OF WALL TO  
ALLOW FOR CLEARANCE OF SOLENOIDS.

T e f r a c N a e d N d c r e n b e b n c a e N n N c e .



A SLOAN VALVE COMPANY

10500 Seymour Avenue • Franklin Park, Illinois 60131-1259  
Phone 800-671-6970 • Fax 847-671-6944