Descrip ion

Waterproof push button for use with any MICROPlumb® controller. Activates water closets, lavatories and showers.

Specifica ions

- 35 VDC Maximum
- 0.20 AMP Maximum
- Stainless Steel Housing
- PG-16 Thread – Major Diameter .874/.886 in.
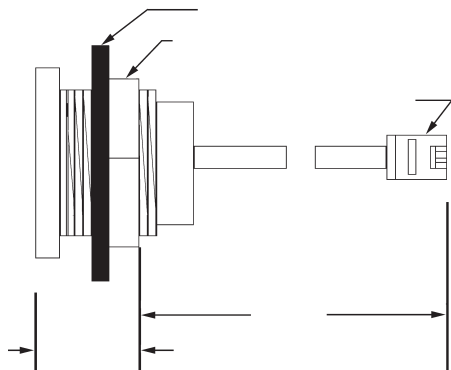- 15′ Cord w/6 Position, 4 Pin RJ-11 Modular Plug

Varia ions

1	Diameter round hole
1	Diameter "D" style hole

Accessories

- ETF 1003-72   6′ Single Wire Extension Cord Kit
- ETF 1003-108   9′ Single Wire Extension Cord Kit
- ETF 1003-240   20′ Single Wire Extension Cord Kit
- MCR 41-A   20′ Three Wire Extension Cord Kit
- MCR 42-A   20′ Four Wire Harness Extension Cord Kit

NOTE: The MCR 140-A Push Button cord can be extended to an overall maximum length of 200′ (with the purchase of MICROPlumb® extension cord kit for push buttons and solenoids).

REAR VIEW

ROUND HOLE

D HOLE

ROUND HOLE	D HOLE
.88" (22.35mm)	.815" (20.70mm)
1.10" (27.94mm)	1.28" (32.51mm)

PWT® ●GRAMMED WATER TECHNOLOGIES