

MICROPlumb® PRODUCTS Push Button

► Description

Waterproof push button for use with any MICROPlumb® controller. Mounts on fixture back splashes, wall box covers or walls up to 2.5" thick. Activates water closets, lavatories and showers.

► Specifications



- 35 VDC Maximum
- 0.20 AMP Maximum
- Stainless steel button w/chrome plated brass flange
- 1.25" hole required
- 15' Cord w/6 position, 4 pin RJ-11 modular plug

► Variations

<input type="checkbox"/> -1	"A" = 1.28"	Less than 1" wall thickness
<input type="checkbox"/> -2	"A" = 2.28"	1" wall thickness
<input type="checkbox"/> -3	"A" = 3.28"	2.5" wall thickness



- **Accessories**
- 6' Single wire extension Cord Kit
 - 9' Single wire extension Cord Kit
 - 10' Single wire extension Cord Kit
 - Three wire extension Cord Kit
 - Four wire harness extension Cord Kit
- **Notes**
- The button cord can be extended to 150' (with the purchase of 150' extension cord for push buttons and solenoids).

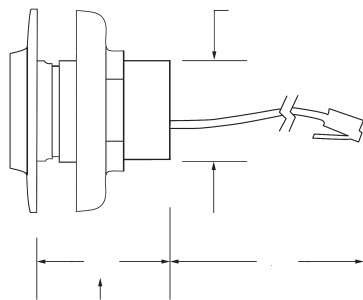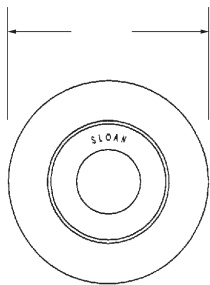

This space for Architect/Engineer use.

The information contained in this document is subject to change without notice.

