

MICROP **b**
PRODUCTS
S e d K

MCR
208-A



► **Description**

24 VAC retrofit solenoid kit. Installs on most Acorn, Bradley, Metcraft and Willoughby mechanical lavatory valves. Used in conjunction with MICROPlumb® control modules to provide accurate control of lavatory or shower run times.



► **Specifications**

- 24 VAC – 60 Hz operating voltage
- Current In Rush: 13 VA
 Holding: 9 VA
- 160°F maximum water temperature
- Pilot operated
- Integrated Screen Filter
- Dual O-Rings
- Includes 15' cord w/6 position, 4 pin RJ-11 connection
- Knurled Locknut w/1.125" – 18 UNEF-2B thread

► **Accessories**

- ETF 1003-240 20' Extension Cord Kit

NOTE: Solenoid cable length can be increased to a maximum overall length of 200 feet using MICROPlumb® extension cords.

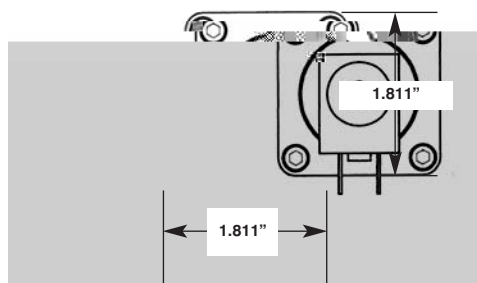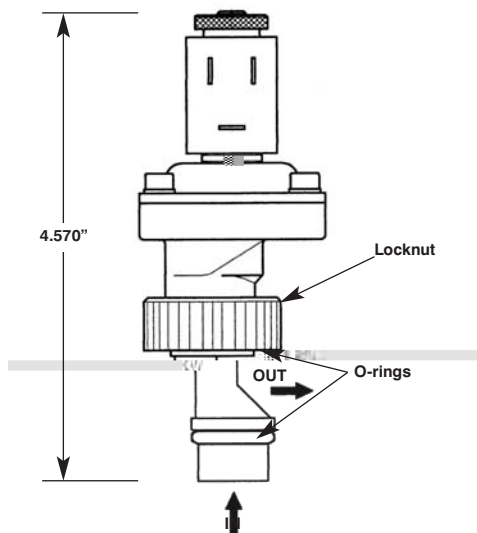

The information contained in this document is subject to change without notice.

