


Green Guard®

PB6HD Roofing Cover Board

For use with mechanically-fastened EPDM, TPO and PVC single-ply roof membranes

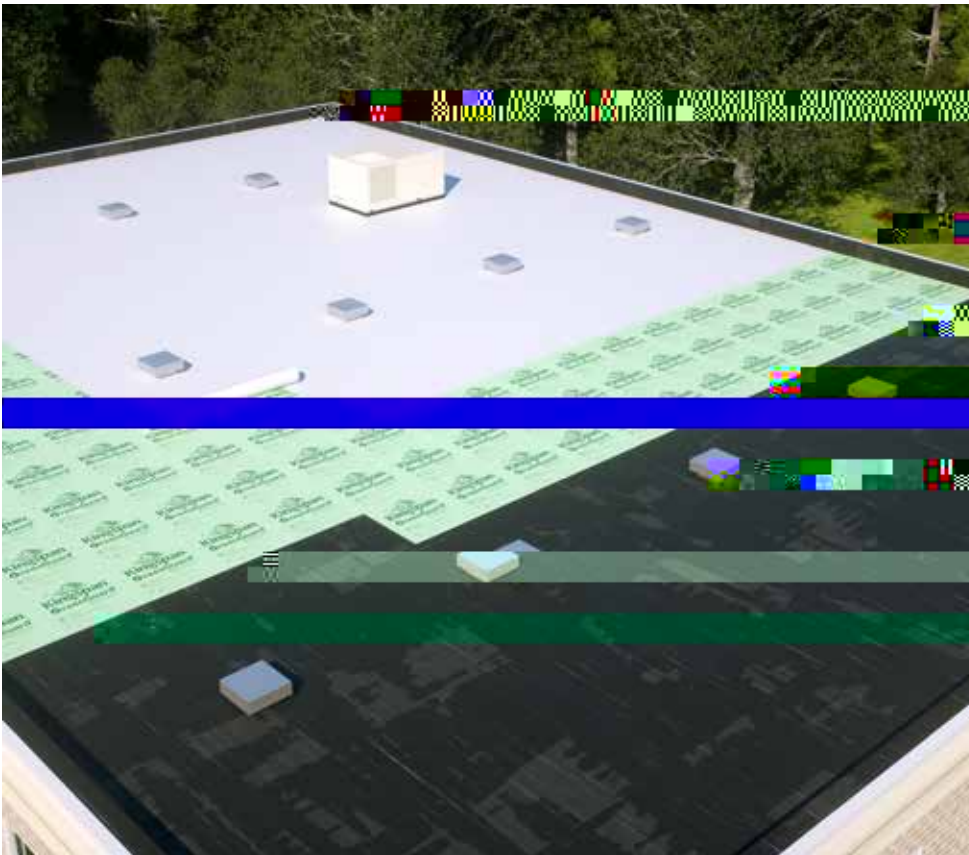

Higher-density cover board

Highly moisture resistant

Maintains integrity

4' x 50' fanfold

UL Listed



Description

Kingspan GreenGuard® D6* < 8 Fcc b['7cj Yf 6cUfX`Vta dfJgYgVtcgYX W`''
\\[\\ XYbg]hmYI Hfi XYX`dc`ngmfYbY`fLDGk`Jh\\`\\[\\ g`fYb[h\\` `a` ZJWf`g`cb`
both sides.

h`J`gd`Y`W` WJ`m`X`Y`g`[b`Y`X`Z`c`f`V`ta` a` Y`f`W`U`f`cc` b[`U`dd`J`W`h`c`b`g`J`b`j`c`j` J`b`[` `
mechanically attached EPDM, TPO and PVC single-ply roof membranes.

Kingspan GreenGuard® D6* < 8 Fcc b['7cj Yf 6cUfX` can be installed directly over existing coal tar roof systems if the roof has not been resaturated within the previous 4 years. (Otherwise, use a polyethylene separator sheet between the Kingspan GreenGuard® D6* < 8 Fcc b['7cj Yf 6cUfX` and the existing roof system). In addition, the new roof system must be designed to limit the maximum coal tar temt(o)-17.on, th5.7 -11.8 565.2(o)-11.8 (r s)31.8 (1)9.9 (0o)-1711.°F to prevent volatiles from